LISTED E6070 STD.4 E6070

MODEL MOD-400TDM WARMER WITH AUTO WATER FILL

DIMENSIONS: INCH (MM)

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE			
BACK	SIDE	BOTTOM	FRONT
1 (25)	1 (25)	6 3/4 (171)	6 (152)



Single Control Panel

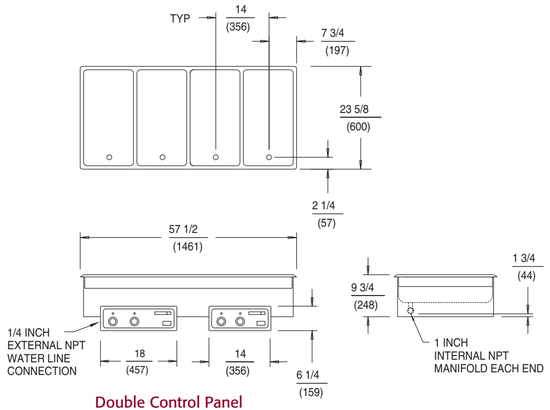

Double Control Panel

MOD-400TDM ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE 3 PHASE			AMPS	POWER
			L1	L2	L3	SINGLE PHASE	SUPPLY CORD
MOD-400TDM/AF	208	4960	14.5	14.5	9.8	23.8	NONE
MOD-400TDM/AF	240	6600	17.8	17.8	11.3	27.5	NONE

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes.

02/02 • REV(-) • PART NO. 303438

LISTED E6070 STD.4 E6070

MODEL MOD-500TDM WARMER WITH AUTO WATER FILL

DIMENSIONS: INCH (MM)

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE			
BACK	SIDE	BOTTOM	FRONT
1 (25)	1 (25)	6 3/4 (171)	6 (152)



Single Control Panel

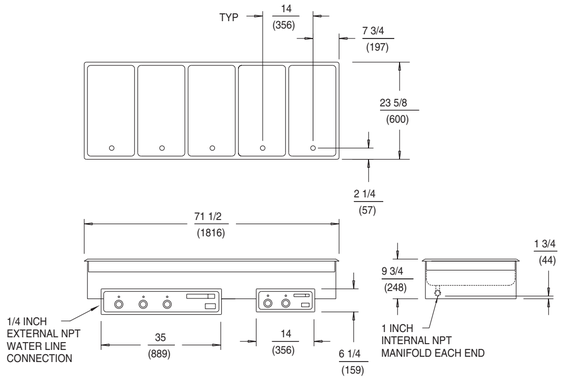

Double Control Panel

MOD-500TDM ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE 3 PHASE			AMPS	POWER
			L1	L2	L3	SINGLE PHASE	SUPPLY CORD
MOD-500TDM/AF	208	6200	19.5	14.6	14.6	29.8	NONE
MOD-500TDM/AF	240	8250	22.1	16.9	16.9	34.4	NONE

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes.

WELLS MANUFACTURING COMPANY
2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A.
USA PHONE: (775) 345-0444 • FAX: (775) 345-0569
FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142
www.wells-mfg.com
© 2002 WELLS MANUFACTURING • PRINTED IN THE U.S.A.
02/02 • REV(-) • PART NO. 303438

ITEM NO. _____

MOD-100TD, 200TDM, 300TDM, 400TDM, 500TDM WARMERS WITH AUTO WATER FILL

Specifications

Temperature Settings: OFF/LO to HI

Weights:	Lbs.	KG
MOD-100TD series:		
Installed	19	9
Shipping	21	10
MOD-200TDM series:		
Installed	41	19
Shipping	51	23
MOD-300TDM series:		
Installed	64	29
Shipping	78	35
MOD-400TDM series:		
Installed	81	37
Shipping	98	44
MOD-500TDM series:		
Installed	97	44
Shipping	118	54

Accessories / Options

Wellslok Extension Kit, designed for installation in countertops up to 1-1/2" thick, refer to installation instructions, 22593

Drain Valve Extension Kit, extension from drain to counter front with remote handle, for use with MOD-100TD only, 20385

Drain Screen, 21709

Optional 72" Wiring, thermostatically controlled warmers, priced per well, contact factory

Explanation of Built-In Warmer Suffixes:

TD.....thermostatically controlled/with drain
TDM.....thermostatically controlled/with drain/ connected to drain manifold

Features

- All models have an **automatic water fill system** that maintains the proper water level in each pan through the use of a water sensor and solenoid valve.
- **Individual controls** for each well give the warmers maximum versatility.
- Thermostats are combined with **higher wattage elements** to provide quicker heat-up and faster recovery.
- **Fully insulated** for greater efficiency.
- **A one-inch diameter drain manifold** (DM models) is provided to allow for a single drain connection at the left or right front corner. MOD-100TD has a one-half inch drain.
- **Each well is one-piece, deep-drawn, stainless steel** for maximum strength and durability.
- Warmers are designed for **wet operation only.**
- **Wellslok** allows for quick and easy installation in stainless steel countertops.
- The MOD Series Warmers are **Underwriters Laboratories, Inc. LISTED** and meet **NSF** International and Canadian standards.
- **A one-year warranty** against defects covers parts and labor.

MOD-100TD - MOD-500TDM WARMERS WITH AUTO WATER FILL

LISTED E6070 STD.4 E6070

MODEL MOD-100TD WARMER WITH AUTO WATER FILL

DIMENSIONS:

INCH (MM)

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE			
BACK	SIDE	BOTTOM	FRONT
1 (25)	1 (25)	6 3/4 (171)	4 1/8 (105)

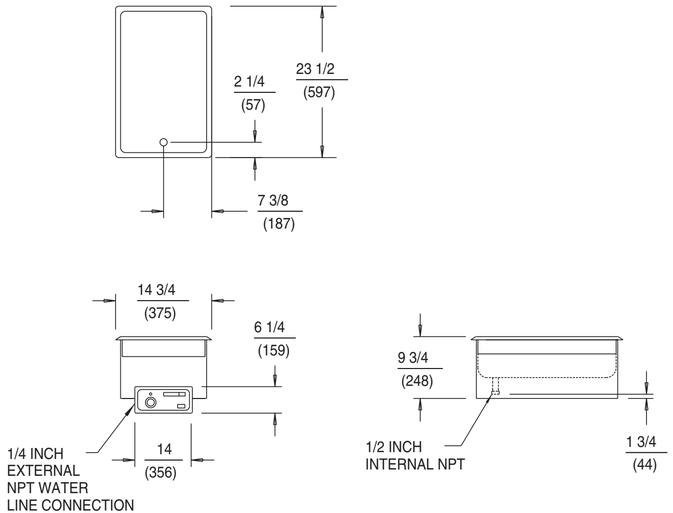

MOD-100TD ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS	PHASE	POWER SUPPLY CORD
MOD-100TD/AF	208	1240	6.0	SINGLE	NONE
MOD-100TD/AF	240	1650	6.9	SINGLE	NONE

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes.

WELLS MANUFACTURING

LISTED E6070 STD.4 E6070

MODEL MOD-200TDM WARMER WITH AUTO WATER FILL

DIMENSIONS:

INCH (MM)

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE			
BACK	SIDE	BOTTOM	FRONT
1 (25)	1 (25)	6 3/4 (171)	4 1/8 (105)

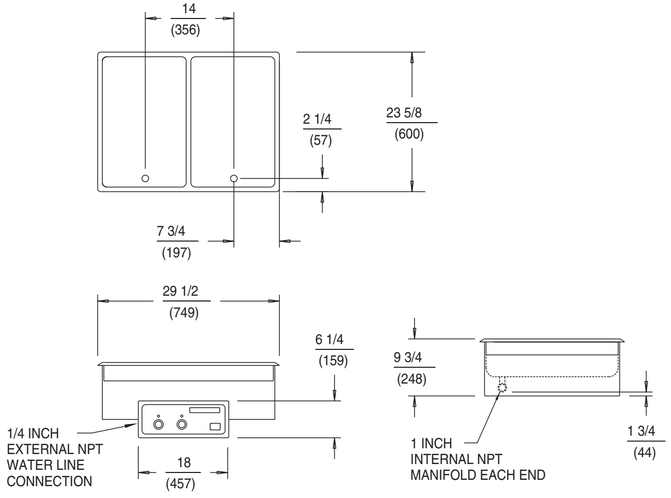

MOD-200TDM ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE 3 PHASE			AMPS	POWER
			L1	L2	L3	SINGLE PHASE	SUPPLY CORD
MOD-200TDM/AF	208	2480	6.0	10.3	6.0	11.9	NONE
MOD-200TDM/AF	240	3300	6.9	11.9	6.9	13.8	NONE

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes.

WELLS MANUFACTURING

LISTED E6070 STD.4 E6070

MODEL MOD-300TDM WARMER WITH AUTO WATER FILL

DIMENSIONS:

INCH (MM)

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST SURFACE			
BACK	SIDE	BOTTOM	FRONT
1 (25)	1 (25)	6 3/4 (171)	4 1/8 (105)

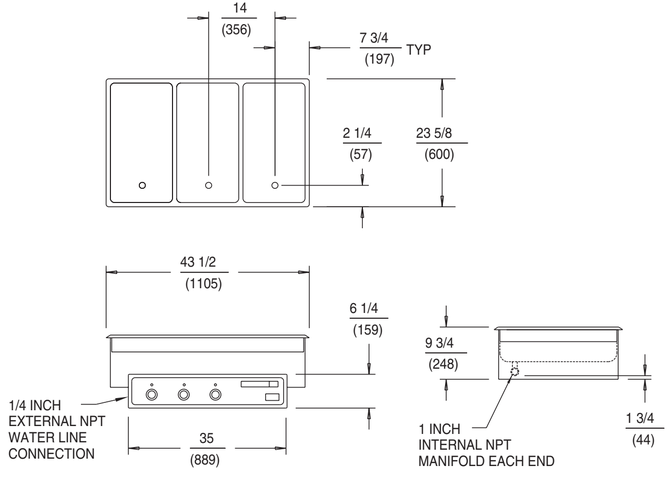

MOD-300TDM ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE 3 PHASE			AMPS	POWER
			L1	L2	L3	SINGLE PHASE	SUPPLY CORD
MOD-300TDM/AF	208	3720	10.3	10.3	10.3	17.9	NONE
MOD-300TDM/AF	240	4950	11.9	11.9	11.9	20.6	NONE

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes.